

Overview

The **CTH27** series is a compact and efficient solution designed for indoor temperature and humidity detection and control. It combines advanced engineering with user-friendly features, making it ideal for environments requiring precise monitoring and management of temperature and humidity levels.

Features

- Compact and space-saving design
- Easy installation and operation
- Built-in protection against lightning surges, electrostatic discharge, and group pulses
- High voltage resistance for durability
- Strong anti-interference capabilities
- Integrated alarm function for enhanced monitoring.

Applications


- Computer rooms
- Office buildings
- Warehouses
- Industrial facilities
- Other environments requiring temperature and humidity control

CTH27

Indoor Temperature Humidity Controller



Dimensions

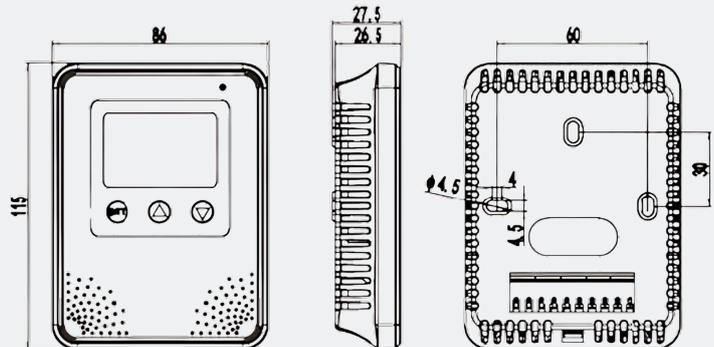

Specifications:

Indoor Temperature Humidity Controller

Relative humidity

Sensor	Digital
Range	0%~100%RH
Output	RS485/Modbus, 0~10VDC
Accuracy	±3%@ 20°C& 20~80%RH
Response time	≤10s(20°C, slow flow air)

Temperature

Sensor	Digital or thermal resistance, see Order Ref No
Range	0~50°C, -20~60°C etc.
Output	0~10VDC, RS485/Modbus
Thermal Resistance	See Order Ref No. and Thermal Resistance Indexing Table
Accuracy	Digital:±0.3°C@0~60°C/Thermal resistance:±0.2~0.4°C@25°C
Power Supply	Voltage type/RS485 type :15~35VDC/24VAC±20% Note: when RS485 and voltage type uses AC power supply, an isolation transformer is required
Output Load	≥10 KΩ (voltage output)
Display Accuracy	0.1°C, 0.1%RH
Display	LCD display and keys with unit display and backlight
Alarm function	1xBUZZER, 1xLED
Relay	2xSPST, 3A/30VDC, 3A/250VAC
Shell Material	PC
Working Environment	-20~60°C ,5%-95%RH (Non-condensing)
Protection Level	IP30

Selection Code:

Code and description		Remark
CTH27	Indoor Temperature Humidity Controller	Model
3	±3%RH(±0.5°C)	Accuracy Range
V10	0~10VDC(3-wire)	Humidity Output
RS	RS485/Modbus	
V10	0~10VDC(3-wire)	Temperature Output
RS	RS485/Modbus	
1	Pt100, ±0.2°C@0°C	
2	Pt1000, ±0.2°C@0°C	
3	NTC10K, ±0.4°C@25°C	Temperature Range
4	NTC20K, ±0.4°C@25°C	
1	NO	
2	0~50°C	
3	-20~60°C	Display
9	Others (customized)	
2	Setting button, backlight LCD display with unit	
1	Alarm only	Alarm and relay
2	Relay only	
3	Alarm and relay	

Despite all attempts to guarantee accuracy in this specification, NeoWave cannot be held liable for any damage injury, loss, or expense due to errors or omissions. Product specification and design might change without prior notice in pursuit of technical enhancements.

For technical support please contact: support@neowave.tech