

Overview

The **NW-ISM-08G-X4** is a rugged 8-port Gigabit Ethernet switch designed for harsh industrial environments. It operates in a wide temperature range (-10°C to 65°C, with an optional -40°C to 75°C version) and supports 12-48VDC power input. Compliant with CE, FCC, and UL61010, it ensures reliable performance in demanding applications. The switch features advanced security (Radius, SSH, SSL) and redundancy protocols (RSTP, MSTP, ERPS), along with a USB port for easy configuration and full L2 management capabilities.

Applications

- Industrial automation (PLC/SCADA systems)
- Hazardous environments (oil/gas/mining)
- Transportation & energy infrastructure
- Outdoor deployments in extreme conditions

Features

- 8-Port Gigabit Ethernet (10/100/1000Base-TX)
- High Availability Protocols: G.8032 ERPS, RSTP, MSTP
- Multicast Support: IGMP v1/v2 (256 groups)
- Traffic Prioritization: IEEE 802.1p QoS with CoS/ToS
- Network Segmentation: IEEE 802.1Q VLAN
- Secure Management: SNMP v1/v2c/v3
- Dual Power Inputs: 12-48VDC redundancy
- Industrial Design: IP30-rated metal housing with DIN-rail mounting
- Wide Temperature Range: -40°C to 75°C (operational)


NW-ISM-08G-X4

Industrial 8 Port L2 Gigabit Switch



Dimensions

Unit: mm

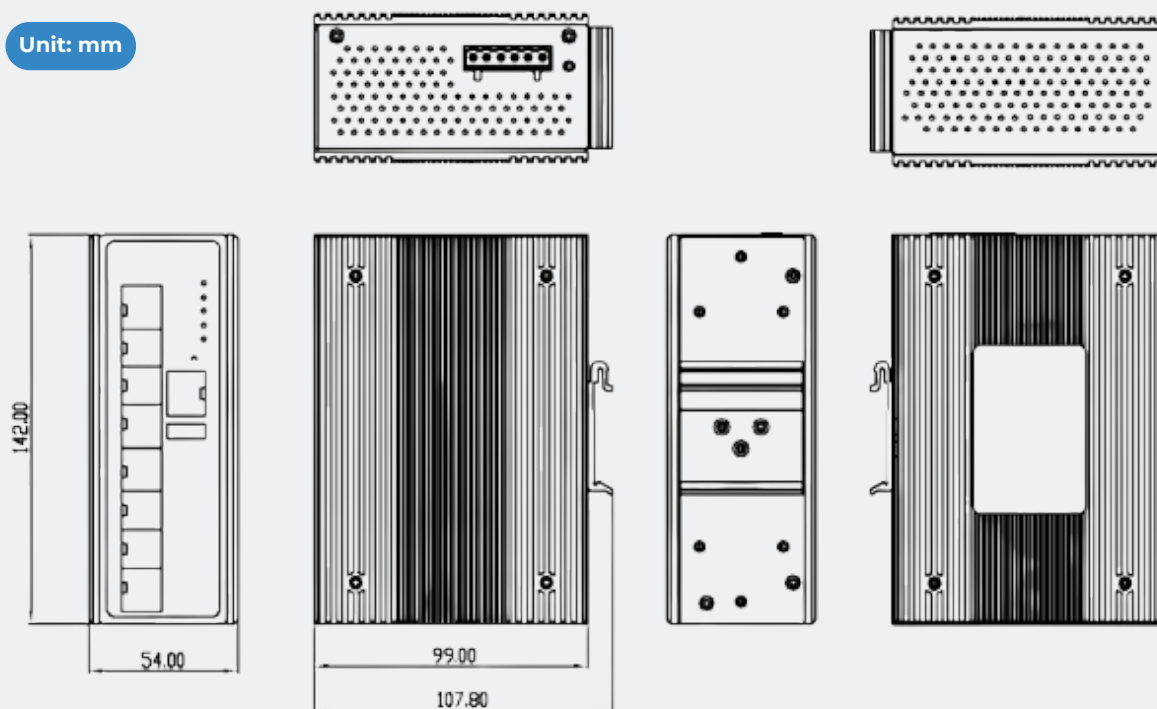

Specifications

Technology

Standards

IEEE 802.3 10Base-T Ethernet
 IEEE 802.3u 100Base-TX Fast Ethernet
 IEEE 802.3ab 1000Base-T Gigabit Ethernet
 IEEE 802.3x Flow Control
 IEEE 802.1d STP (Spanning Tree Protocol)
 IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)
 IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)
 ITU-T G.8032 / Y.1344 ERPS v1/v2 (Ethernet Ring Protection Switch)
 IEEE 802.1Q Virtual Local Area Network (VLAN)
 IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
 IEEE 802.1X Network Authentication
 IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
 IEEE 802.3ad Link Aggregation (LACP)

Processing Type

Store and Forward

Flow Control

IEEE 802.3x flow control, back pressure flow control

Specifications

Network Management

Management

IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone /Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power lost warning, relay trigger

Security

Port-based/Single/Multi 802.1X, ACL(Port/Rate Limiters/ACE), MACbased Authentication, VLAN assignment, QoS Assignment, Private VLAN, Guest VLAN, RADIUS accounting, TACACS+, IP MAC binding, WEB/CLI authentication, Authorization (15 levels), Port Security Limit Control, ACLs for filtering/policing/port copy, IP source guard, ARP Inspection

L2 Switching

Port/MAC/Protocol/IP Subnet-based VLAN, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP snooping v2/v3, MLD snooping v1/v2, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, G.8032 v1/v2

L3 Switching

DHCP option82, IP route

QoS

802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode

Power Saving

ActiPHY, PerfectReach, IEEE 802.3az EEE power management

Network Redundancy

STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2(<50ms)

Configuration

Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3

System / Diagnostics

Dual Image Protection, PING, PING6

Specifications

Switch Properties

Back-Plane(Switching Fabric)	16Gbps
Priority Queues	8
Max. Number of VLANs	4095
VLAN ID Range	VID 1 to 4095
Memory Buffer	4Mbits
Jumbo Frame	9.6Kbytes
MAC Table Size	8K
IGMP Group	1024
Transfer Rate	14,880pps for Ethernet port
	148,800pps for Fast Ethernet port
	1,488,000pps for Gigabit Ethernet port

Interface

RJ45 Ports	8*10/100/1000Base-T(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault
	Ethernet ports: Speed/Link/Active
RS232 Serial Console	1*RS232 in RJ45 connector with console cable
	baud rate 115,200bps,8,N,1
Relay Contact	24 VDC, 1A resistive

Specifications

Power Requirements

Input Voltage	NW-ISM-08G-X4: dual 12-48VDC redundant power inputs
Power Connection	1 removable 6-contact terminal block
Overload Current Protection	Present (Slow-Blow Fuse)
Reverse Polarity Protection	Present
System Power Consumption	Max. 13W full loading

Mechanical Characteristics

Housing	Metal, IP30 protection
Dimensions (W x H x D)	54 x 142 x 99 mm (2.13 x 5.59 x 3.9 inch)
Weight	NW-ISM-08G (-T)-X4: Unit weight: 0.9kg (1.98 lb), Shipping weight: 1.3kg (2.87 lb)
Mounting	DIN-Rail Mounting, Wall Mounting

Environmental Limits

Operating Temperature	Standard: -10°C ~ 65°C (14°C ~ 149°F) Extend: -40°C ~ 75°C (-40°C ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°C ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)

Specifications

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A,
	CE EN55022/EN61000-6-4 Class A
EMS	CE EN55024/EN61000-6-2 Class A:
	IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT),
	IEC61000-4-5 (Surge), IEC61000-4-6 (CS),
	IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration IEC60068-	EC60068-2-6
Green	RoHS Compliant
Safety	UL61010-1, UL61010-2-201 compliant
MTBF (Telcordia SR-332, Issue 3, GB, 25oC)	598,384 hrs.

Ordering Information

Model Name	Software	10/100/1000 TX	Operating Temperature	Power input
NW-ISM-08G-X4	L2	8	-10°C ~ 65°C	12-48VDC redundant
NW-ISM-08G-T-X4	L2	8	-40°C ~ 75°C	12-48VDC redundant

Despite all attempts to guarantee accuracy in this specification, NeoWave cannot be held liable for any damage injury, loss, or expense due to errors or omissions. Product specification and design might change without prior notice in pursuit of technical enhancements.

For technical support please contact: support@neowave.tech