


Overview

FS03 Float Switch Easily control liquid levels in barrels, tanks, and wells with the FS03 Float Switch. Automatic, reliable, and simple to install, it requires no maintenance and is safe, non-toxic, and eco-friendly. Resistant to sewage and harsh liquids, it's perfect for domestic, industrial, and mining applications—including oil, acid, and alkali tanks, sinks, and more.

FS03


FLOAT SWITCH

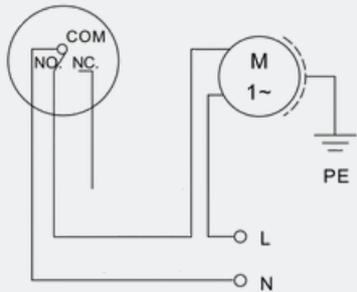


1. Auto-fill-water modes

Connect the control's blue line to electric pump, black line is connected to zero-line, brown line can not be connected and should be insulated.

Dimensions

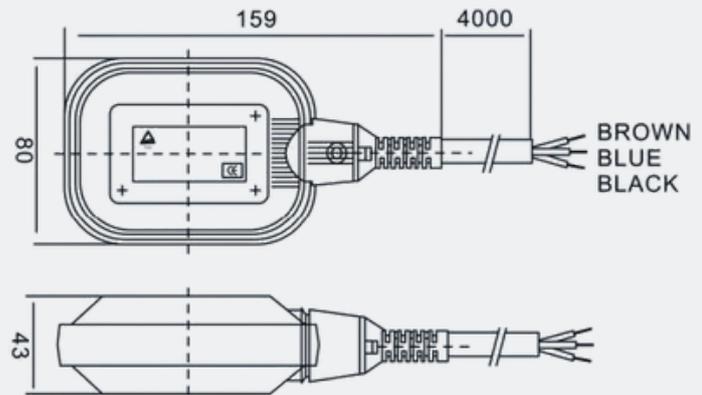

2. Auto-drainage and lack-water protection modes

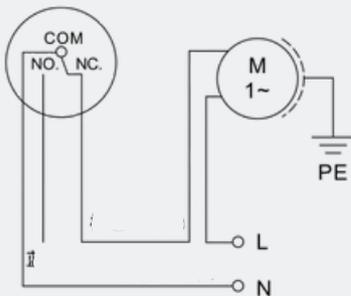

Connect the control's brown line to electric pump, black line is connected to zero-line, blue line can not be connected and should be insulated.

Specifications

FLOAT SWITCH

Rated voltage	AC110/220V
Max.Current Frequency	AC 16(4)A
Max.Using	50/60Hz
Temperature	60°C
Protection Degree	Ip68

Despite all attempts to guarantee accuracy in this specification, NeoWave cannot be held liable for any damage injury, loss, or expense due to errors or omissions. Product specification and design might change without prior notice in pursuit of technical enhancements.

For technical support please contact: support@neowave.tech